



Alarming

As soon as a defined threshold value is exceeded an alarm is given by the INspektor®. Hence appropriate maintenance measures can be taken in good time.

The alarm list supplied by the INspektor® provides detailed information about what error occurred at which device, at which time and which event (threshold value) caused this. The large memory allows recording of up to 2000 alerts. Each alert includes a snapshot of 500 telegrams.



Alarm features

- Email notification
- Floating contact
- LED display

Topology


The topology of your PROFIBUS network is directly visible via the web interface of the INspektors®.

A network overview is provided with a clear statement on the current PROFIBUS network status.



Error statistics

There is a clear display which device is affected most by events (e.g. repeat telegrams). This information is essential for troubleshooting.

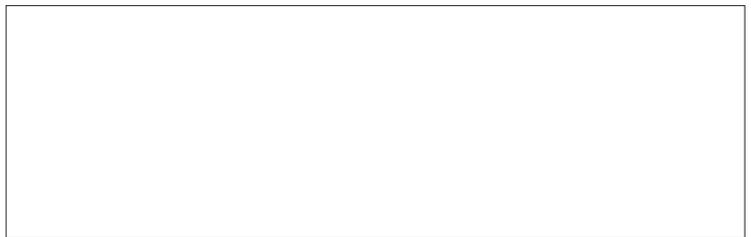

Recommendation

The network management software PROmanage® NT provides long-term recording throughout the entire life cycle of your plant. Additionally, all network data of PROFIBUS plants at various locations can be centrally summed up.

3URNRUPHQW
:DWHUORRS
1/ 8IOIW

7H0HIRRQ

(PD LO
LQRF URNRUPHQWQO
+RP HSDH
URNRUPHQWQO

Ordering details	Art. No.
PROFIBUS-INspektor® NT	124010020
PROmanage® NT (40 ports / 5 PB-INspektors®)	117000031