

## PROFINET Switch PROmesh P9

### Function

The Indu-Sol **PROFINET Switch PROmesh P9** is the first Full-PROFINET Switch that is equipped for the increased performance requirements in the PROFINET and conforms to Conformance Class B requirements. This functionality makes it possible to integrate the switch into the automation system (Step7, TIA Portal) by an engineering tool in order to make a comprehensive network diagnostics feasible.

With its optimised shielding contacts in the RJ45 jacks and leakage current monitoring, the PROmesh series not only meets the requirements for PROFINET functionality but also fulfils highest demands for EMC resistance in the industrial environment. That is why it can also be employed in areas with heavy electro-magnetic loads.

In addition, many useful management functions such as IGMP snooping, VLAN, QoS, SNMP, bandwidth management and alerts via email or relay output can be used. The switch has 4 priority queues per port.

### Technical data

- Input voltage: 24V DC +-20%, redundant power supply
- Max. Power consumption: 800 mA
- Max. power loss: 8 W
- Dimensions (H x W x D): 105 x 49 x 112 mm
- Weight: 490 g
- Casing: aluminium, anodised
- Storage temperature: -40°C to +85°C
- Operating temperature: 0°C to +55°C
- Protection class: IP20
- Mounting: TS35 DIN top-hat rail


### Features

- Network port: 9 x 10/100Base-TX RJ45-Ports
- Technology: Store und Forward
- Monitoring of leakage current: Sampling rate 25KHz range 0 - 10A
- Display of netload with millisecond accuracy
- Supported protocols: MRP-Master, MRP-Client, DCP, I&M, DHCP, IGMP, LLDP, PDEV, QoS, RSTP, STP, SMTP, SNMP, SNTP, VLAN only TX packets or TX and RX packets
- Port Mirror: PN-RTA, SNMP, email, relay
- Alert:
- Bandwidth control




PROFINET Switch PROmesh P9

### Shielding Current

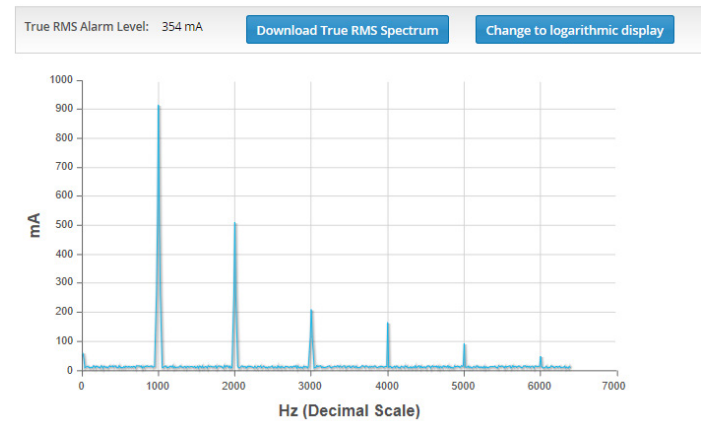

Monitoring of leakage current

### Workload for port 1

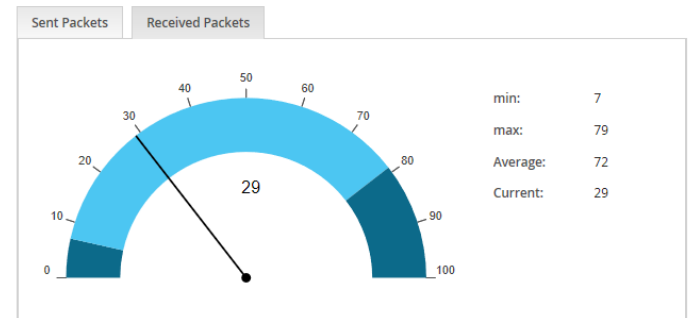

Display of netload with millisecond accuracy

### Ordering details

PROFINET Switch PROmesh P9

### Art. No.

6114110020